



TEHNIČNI LIST – DIMENZIJE HIDROMOTORJI MM

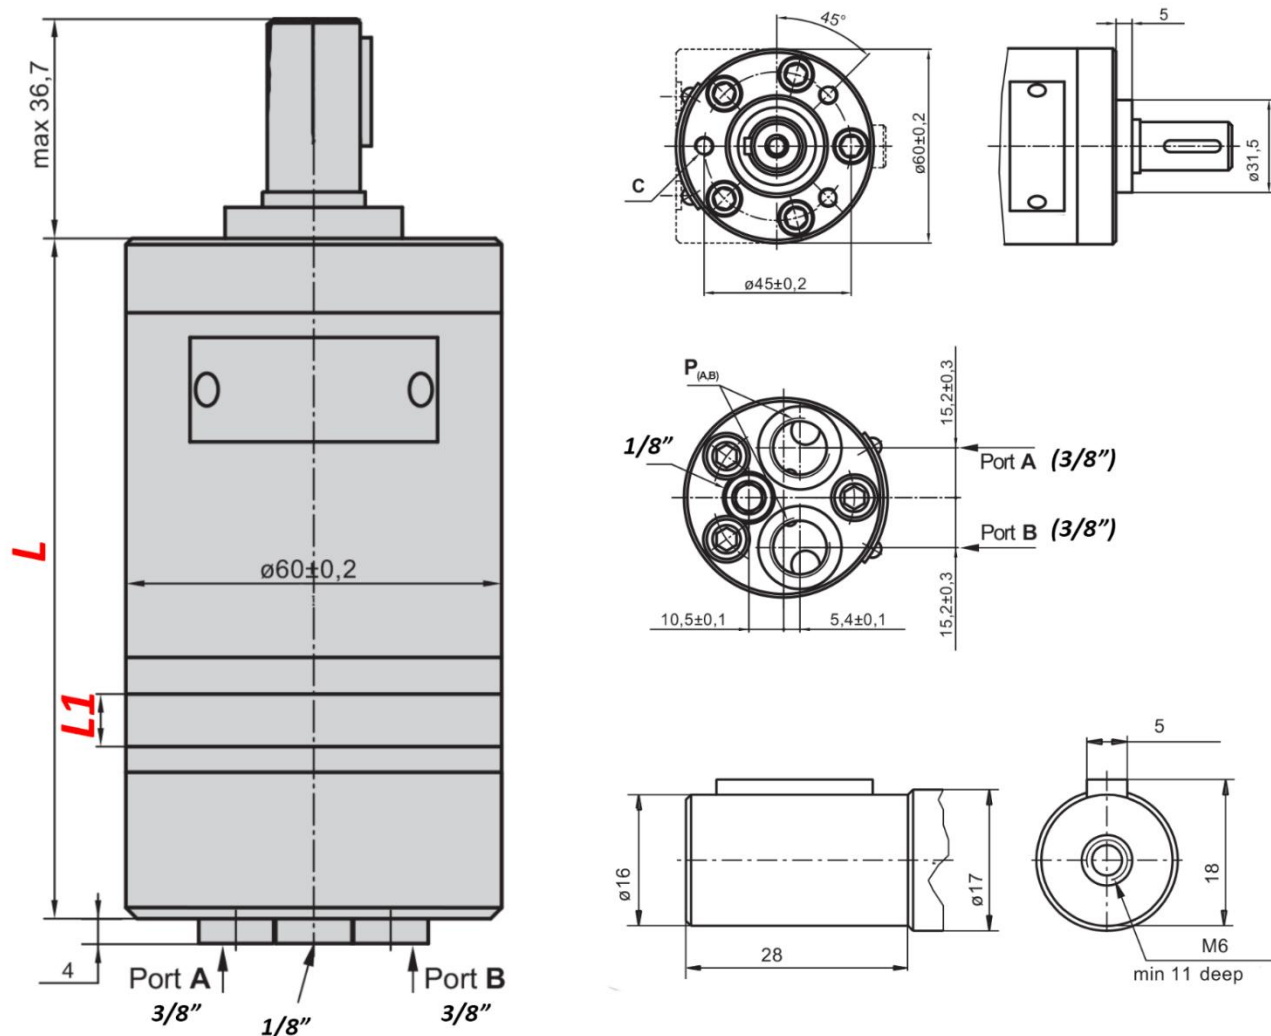


	L	L1
	(mm)	
MM 8	105	3,5
MM 12,5	107	5,5
MM 20	110	8,5
MM 32	115	13,5
MM 40	118,5	17
MM 50	122,5	21

		MM 8	MM 12,5	MM 20	MM 32	MM 40	MM 50
cm/vrtljaji		8,2	12,5	19,9	31,6	39,8	50
Vrtljaji [rpm]	konstantni	1950	1550	1000	630	500	400
	s prekinitvami	2450	1940	1250	800	630	500
Navor [daNm]	konstantni	1,1	1,6	2,5	4	4,5	4,6
	s prekinitvami	1,5	2,3	3,5	5,7	7	8,8
	max.	2,1	3,3	5,1	6,4	8,2	10
Moč [kW]	konstantna	1,8	2,4	2,4	2,4	2,2	1,8
	s prekinitvami	2,6	3,2	3,2	3,2	3,2	3,2
Priključni tlak [bar]	konstantni	140	140	140	140	140	140
	s prekinitvami	175	175	175	175	175	175
	max.	225	225	225	225	225	225
Padec tlaka [bar]	konstantni	100	100	100	100	90	70
	s prekinitvami	140	140	140	140	140	140
	max.	200	200	200	160	160	160
Pretok olja [L/min]	konstantni	16	20	20	20	20	20
	s prekinitvami	20	25	25	25	25	25
Priključni navoj		3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Teža [kg]		1,9	2	2,1	2,2	2,3	2,5


DIAGRAMI

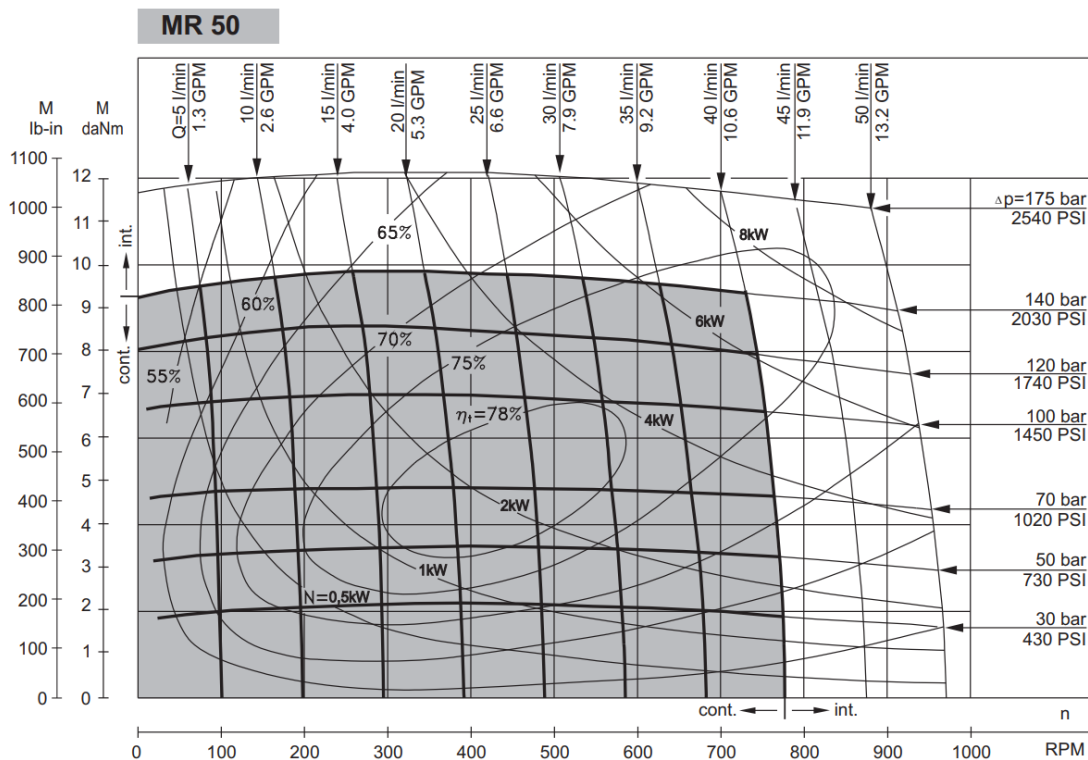


MR 80

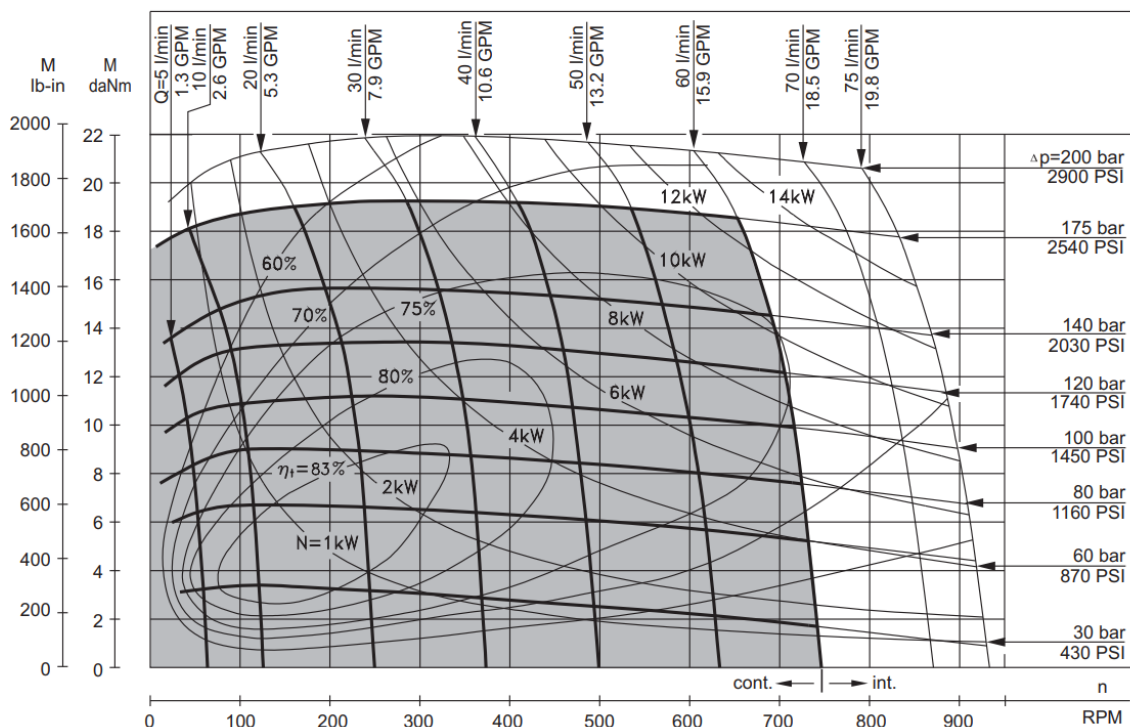


MR 100

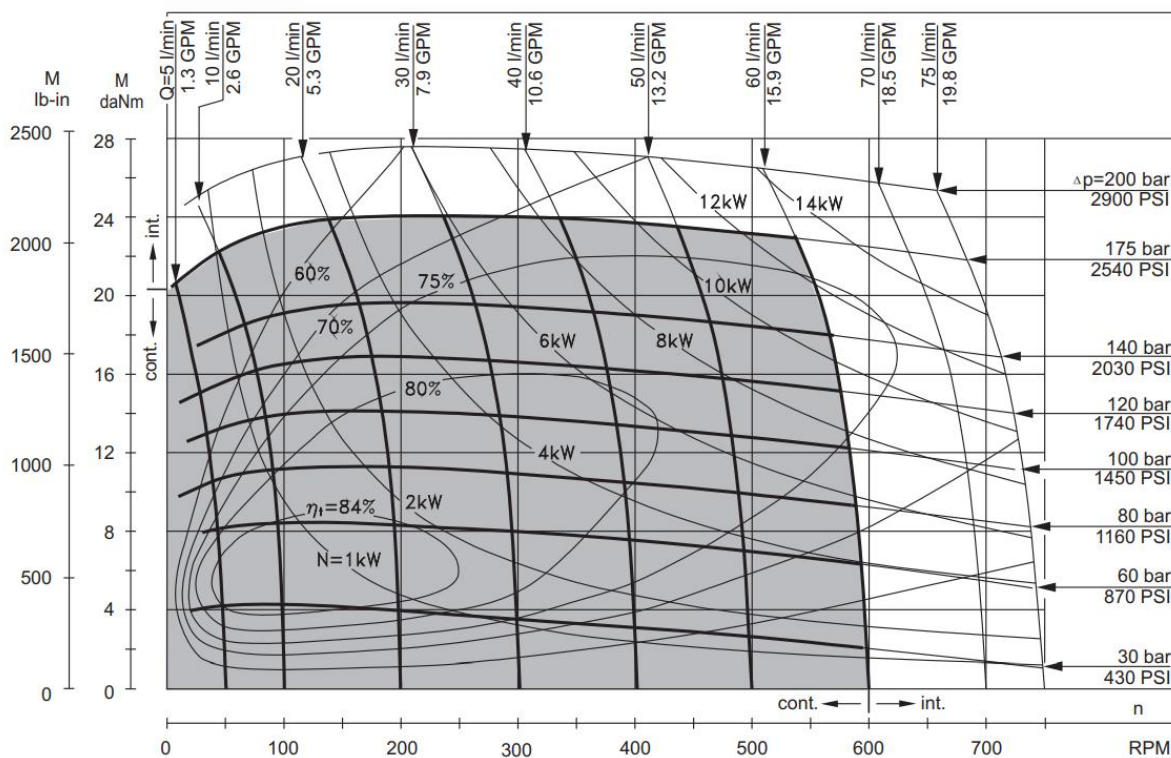


MR 125

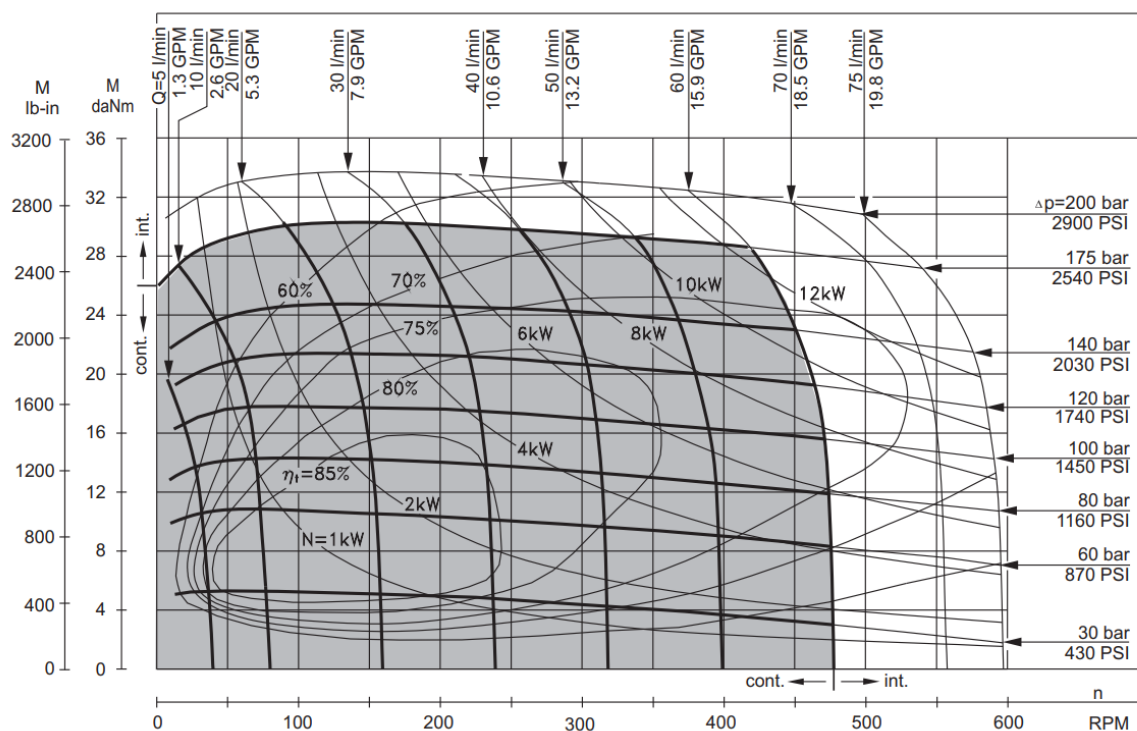


MR 160

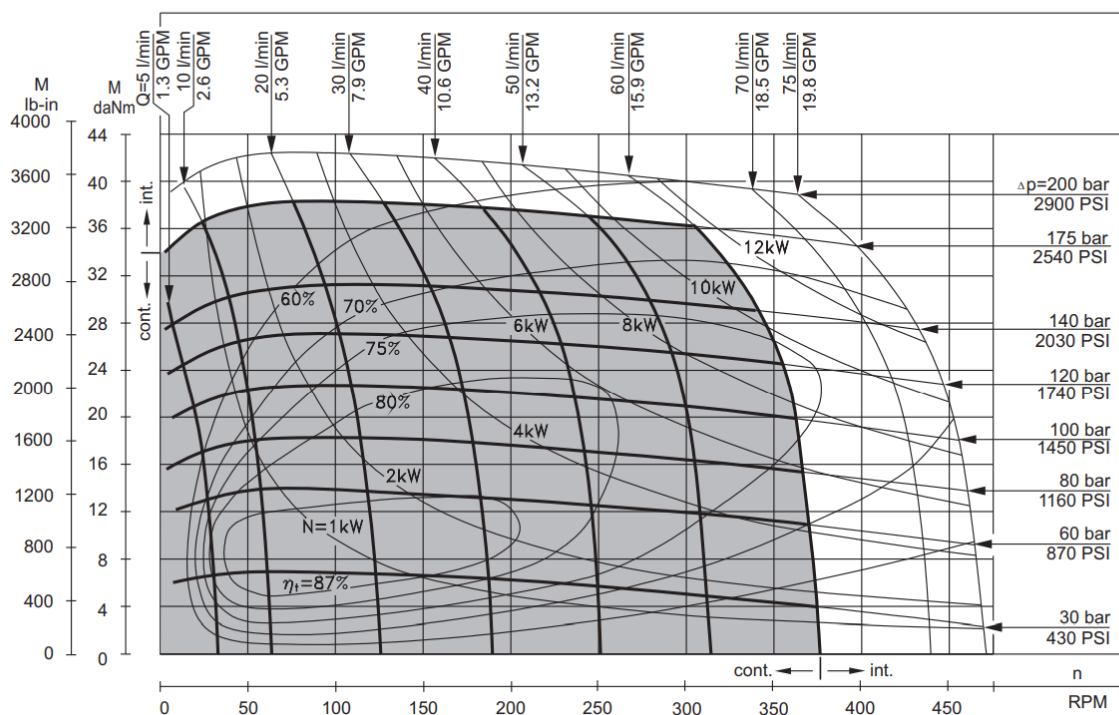


MR 200

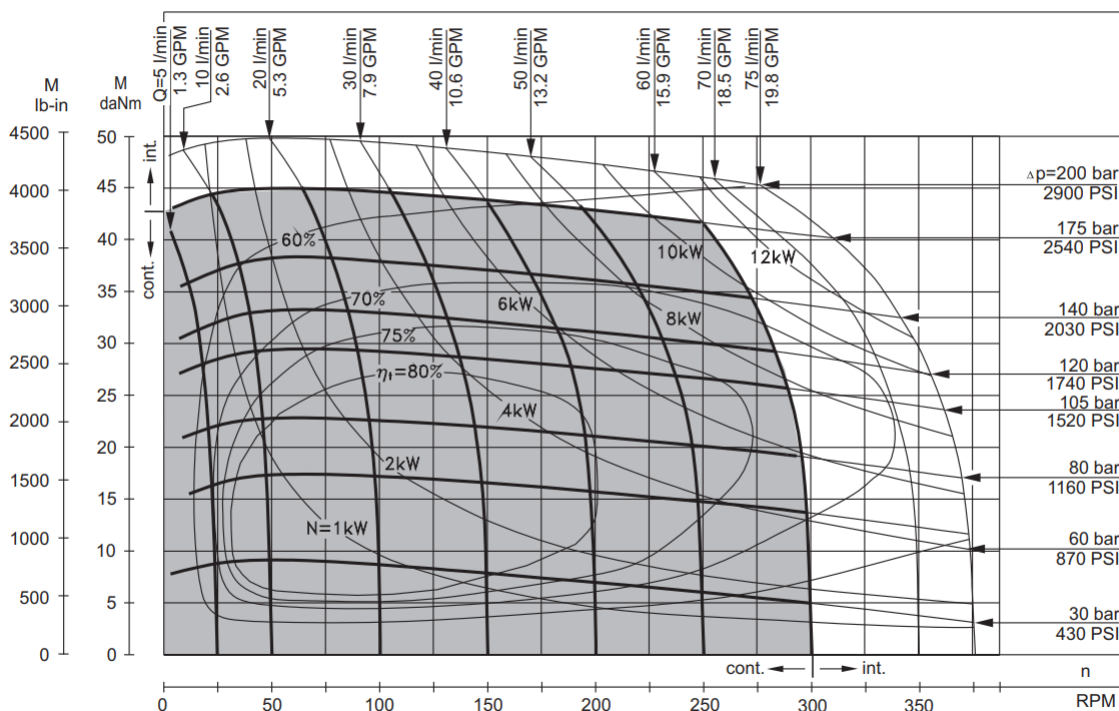

MR 250

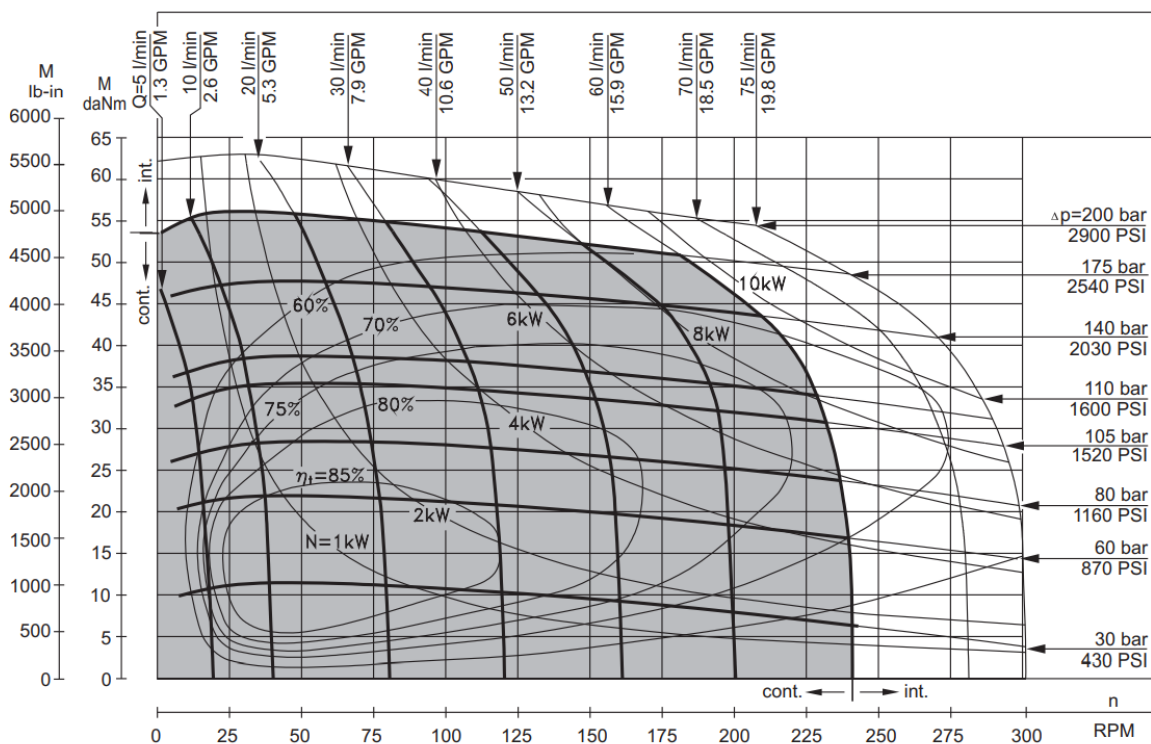

MR 315

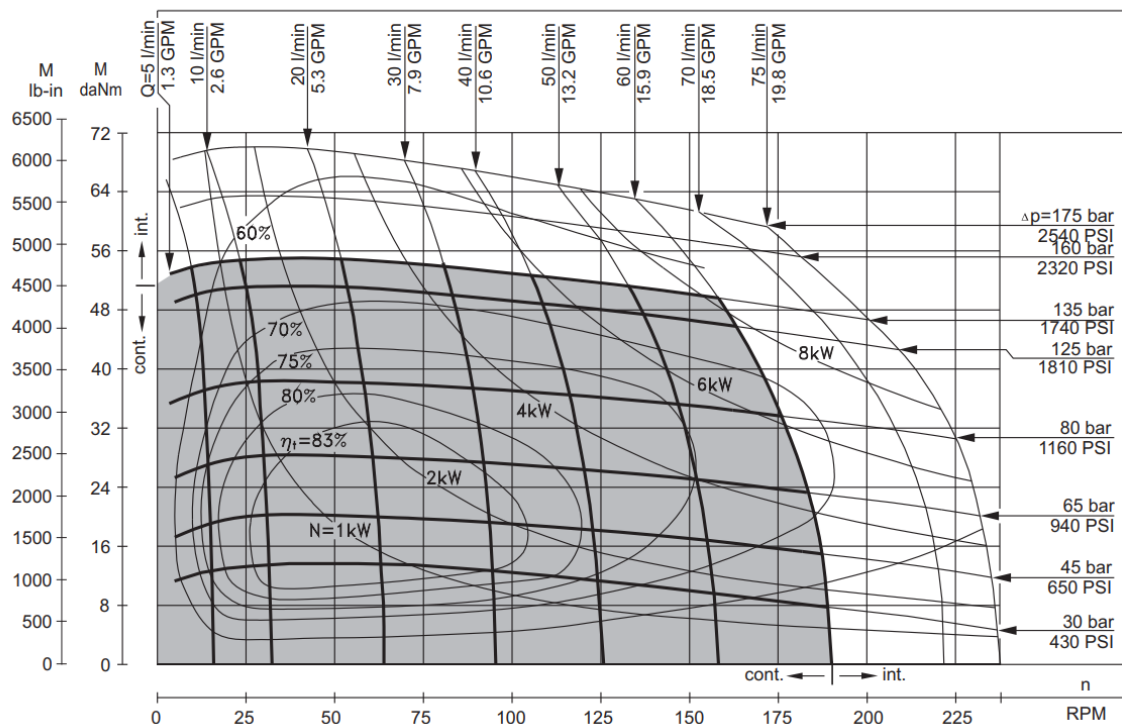

MR 400

